


### Steel Swing Gate Support Wheel Light Duty

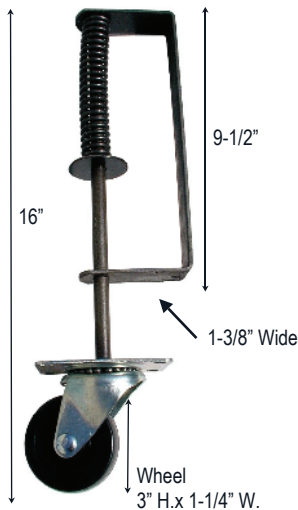

1" Dia. x 5-3/4" Tall Spring  
1/2" Rd. Diameter Steel Rod  
3" Rubber Wheel  
3" x 4" Cover Base Plate  
Wt. 3.30 lbs.


- \* 16" H. x 5" W.
- \* Spring Loaded Wheel
- \* Swivel Bearing Caster
- \* Helps to Support Swing Gates

**SPRWHEEL**

### Heavy Duty Cane Bolt for Swing Gates



**LOCINOX®**



**No Welding  
Needed**



**All Aluminum Parts**


**LOCVSAQFAL**

**Galvanized Steel Rod  
Aluminum Finish**

**LOCVSFQFAL**


- \* Easy to install on existing gates.
- \* No padlock needed, top handle gets trapped between the double gates when the gate is in the closed position.
- \* Height adjustable to 4", 5-1/2" Throw.
- \* Quick Fix Mounting (fits all square posts, 1-1/2" minimum).
- \* Bolt - 19-1/4" L. x Top Handle - 2-1/2" L. x Head Block - 7-7/8" L.
- \* Adaptor for round posts available - use adaptor #6403.
- \* 3/4" Dia. Aluminum Rod - Wt. 1.5 lbs.

### Old Fashion Steel Gate Latch Painted Gloss Black Finish

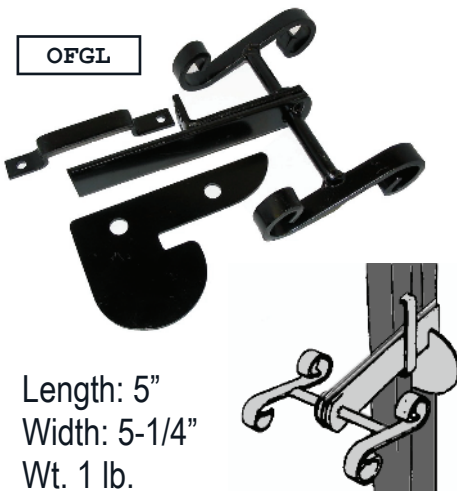

Length: 5"  
Width: 5-1/4"  
Wt. 1 lb.

### Mechanical Cane Bolt Padlock Feature - 1/2" & 3/4" Dia. Plain Steel Finish or Zinc Plated Finish

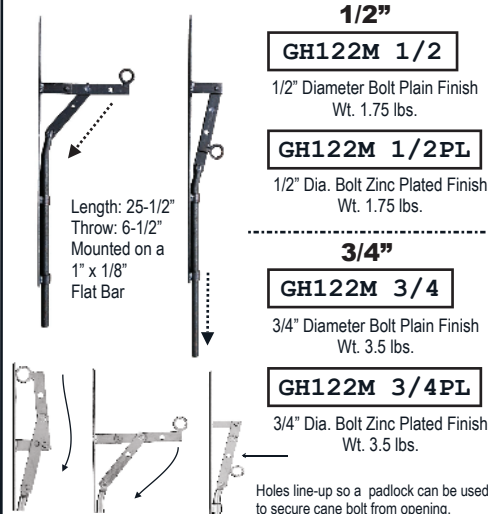

**1/2"**

**GH122M 1/2**

1/2" Diameter Bolt Plain Finish  
Wt. 1.75 lbs.

**GH122M 1/2PL**

1/2" Dia. Bolt Zinc Plated Finish  
Wt. 1.75 lbs.

**3/4"**

**GH122M 3/4**

3/4" Diameter Bolt Plain Finish  
Wt. 3.5 lbs.

**GH122M 3/4PL**

3/4" Dia. Bolt Zinc Plated Finish  
Wt. 3.5 lbs.

Holes line-up so a padlock can be used to secure cane bolt from opening.

### LOKK-BOLT Security Drop Bolt



This key-lockable device comes in two lengths (18" and 24") and is quick and simple to install on all gate and fence materials. It is equally as effective on pedestrian gates as it is on double-drive gates. Clever bolt retention grooves mean this cane-bolt will never drop, drag, bend or grind across driveways! 316 stainless steel rod. Made from strong engineering polymers and stainless steel components.

**18"**

**LLCB18**

**24"**

**LLCB24**

18" x 9/16" Dia. Bolt Wt. 2.75 lbs.

24" x 9/16" Dia. Bolt Wt. 3.25 lbs.

Special retention grooves mean the bolt won't drop and drag.

**Optional Base Plate  
Sold Separately -  
4-3/4" Dia. Base**



**LBBPBG**

Lokk-Bolt models are now all keyed-alike. Kwikset keyway. Models for wood and vinyl gates available.

### Standard Cane Bolt Cadmium Finish Steel 12", 18" & 24" Lengths



**1/2" Diameter bolt**

**GH12212**

12" x 1/2" Dia. Bolt  
Wt. 1.10 lbs.

**GH12218**

18" x 1/2" Dia. Bolt  
Wt. 1.5 lbs.

**GH12224**

24" x 1/2" Dia. Bolt  
Wt. 1.65 lbs.

Brackets are plain steel

### The Gate Stop - "Soft & Quiet"

The GATE-STOP is the ideal gate alignment device for preventing hinge, latch and gate damage, and for prolonging gate life. For gates higher than 4 ft, two GATE-STOPS may be required. Made from strong engineering polymers. Black Finish. White Color Available Special Order.

**For Metal Gates**

3-5/8" H. x 2-7/16" W.  
Wt. 0.25 lb.

**TCGS3**

**For Vinyl Gates**

4-3/4" H. x 5-1/4" W.  
Wt. 0.50 lb.



**TCGS1**



**Rubber Shock Absorber**

### Gate Handle "New Style"



**LLHBG**

5" H. x 1-1/4" W. x 1-1/2" D.

The Lokk-Latch 'GATE-HANDLE' offers the simple convenience of gate opening and closing for most commercial and household gate applications. Made with a strong glass-reinforced polymer construction. The Gate Handle fits left or right handed gates. Fits Metal, Vinyl or wood gates. Black Finish. White Color Available Special Order. Wt. 0.25 lb.

