

CRCODE-200 SERIES

GRADE 2 MECHANICAL PUSH BUTTON LOCK AND EXIT DEVICE TRIM WITH BREAKAWAY LEVER FEATURE



Meets ADA requirements
Specially designed for
Barrier Free Application
Conforms with ANSI A156.2
Series 4000, Grade 2 requirements

- ✓ EASY INSTALLATION COVERS
- ✓ 1 - 12 DIGIT LENGTH CODE
- ✓ SINGLE CODE USER
- ✓ KEY OVERRIDE
- ✓ EASY ON-THE-DOOR CODE
- ✓ CODE-FREE OPTION (PASSAGE)
- ✓ BREAKAWAY LEVER DESIGN
- ✓ CLUTCH-FREE MECHANISM
- ✓ WEATHER RESISTANT
- ✓ NON-HANDED
- ✓ MORE THAN 8000 NON-SEQUENTIAL CODE COMBINATIONS
- ✓ APPLICATIONS:
OFFICES, SCHOOLS, HOSPITALS,
APARTMENTS, HOTELS / MOTELS,
RESIDENTIAL, COMMERCIAL
AND PUBLIC BUILDINGS



INSIDE

CRCODE-202
Standard (Storeroom Function)
Optional (Passage Mode)



INSIDE

CRCODE-203
Standard (Institution Function)
Optional (Storeroom, Passage Mode)
on both sides



INSIDE



**2200
SERIES**

**7700
SERIES**

**9800
SERIES**

CRCODE-204 Universal Trim

2200, 7700 and 9800 Series Rim and Surface Vertical Rods
Standard (Storeroom Function) Optional (Passage Mode)

SPECIFICATIONS

GENERAL

Full length 5 1/2" lever handle with 7/8" return. Escutcheon dimension 3 1/2" x 8 1/8". Key removable outside lever for all models for fast rekeying. Non-handed levers.

BREAKAWAY LEVER DESIGN

Lever will stay at the 5 o'clock position when forced down without retracting the latch, to prevent breaking of handle and giving the impression of the handle being broken to discourage or scare off vandals.

APPLICATIONS

For offices, schools, hospitals, apartments, hotel / motel, residential, commercial and public buildings.

DOOR RANGES

1 3/8" - 2 1/4" for CRCODE-202, 1 3/8" - 1 3/4" for CRCODE-203,
1 3/4" - 2" for CRCODE-204

ANSI STANDARDS

Meets or exceeds ANSI A 156.2, Series 4000 Grade 2 requirements.

LATCH FACEPLATE

Standard 2 1/4" x 1 1/8" for 2 3/4" backset for CRCODE-202 and CRCODE-203 only.

STRIKES

ASA 1 1/4" x 4 7/8" standard for CRCODE-202 and CRCODE-203 only. Other strikes available upon request. Strikes for CRCODE-204 comes standard with exit device ordered.

CYLINDER & KEYWAYS

6 pin solid brass "C" keyway standard. Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Corbin-Russwin L4, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and Cal-Royal (HSK) High Security Cylinders.

TRIM

Thru-bolted assembly through door with separate spring cage for each lever.

HOUSING

Zinc die cast Dichromate finish for rust resistance . 2 1/8" diameter bore.

LATCH OPTIONS

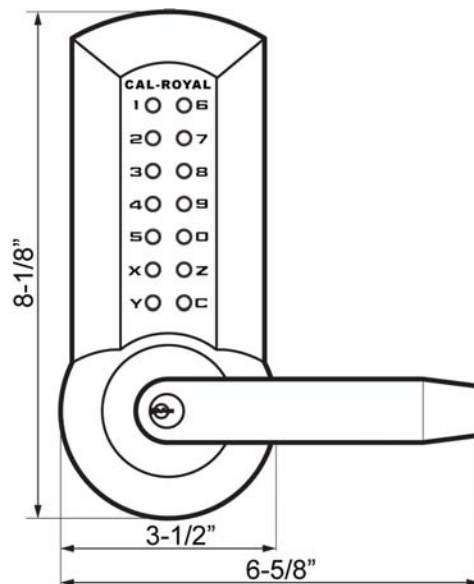
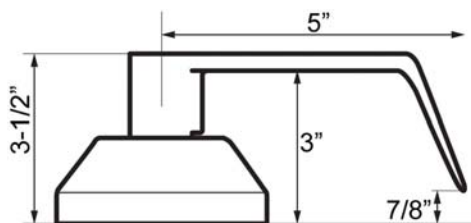
2 3/4" standard, brass with 1/2" throw (with optional 2 3/8" backset, 2 1/4" x 1" faceplate) for CRCODE-202 and CRCODE-203.




Note: CRCODE-202 and CRCODE-203 for non-fire application only.

CRCODE-200 Series FINISHES, FUNCTIONS and FEATURES

FINISHES AVAILABLE		
BHMA SYMBOL	US CODE	DESCRIPTION
626	US26D	Satin Chrome

Refer to price list for stock finishes and availability



FUNCTIONS	
CRCODE-202 	Latch bolt operated by lever from either side, except outside has to enter a pre-programmed code on the keypad in order to retract the latch upon turning the lever. Default Function: Storeroom Optional Function: Passage Mode Door Thickness: 1 3/8" - 2 1/4"
CRCODE-203 	Latch bolt operated by lever from either side by entering a pre-programmed code on the keypad in order to retract the latch upon turning the lever. Both lever always locked, unless one or both sides are set to passage mode. If one side is set to passage, function can be storeroom. If both sides are set to code-free, function becomes passage. Default Function: Institution Optional Functions: Storeroom, Passage Mode Door Thickness: 1 3/4"
CRCODE-204 	Operated by lever from outside and when push pad is depressed, except outside has to enter a pre-programmed code on the keypad in order to retract the latch upon turning the lever. For use with 2200, 7700 and 9800 Series Rim and Surface Vertical Rods. Universal Trim Default Function: Storeroom Optional Function: Passage Mode Door Thickness: 1 3/4" - 2"

FEATURES

✓ SINGLE CODE USER

Only one code combination chosen from thousands of combinations can be set at a time to deter code breakers. Code length is from 1 to 12 digits, and can be permuted with a non-repeating digit up to over 5000 combinations.

✓ EASY ON-DOOR CODE CHANGE

Code can be changed without removing the lock from the door and using only a "code change" key.

✓ 1-12 DIGIT CODE

An entry code can be a combination of 1 to 12 digits long. The digits can be entered in any order. For example, if the chosen 6-digit code is "5283XZ" it can be entered as "ZX3825" or "3X8Z25" or in any other combination of the 6-digit code.

✓ BREAKAWAY LEVER DESIGN

Lever will stay at the 5 o'clock position when forced down without retracting the latch, to prevent breaking of handle and giving the impression of the handle being broken to discourage or scare off vandals.

✓ CODE-FREE OPTION (PASSAGE MODE)

Once enabled, the lock remains unlocked until disable PASSAGE MODE is initiated. (For CRCODE-203, inside and outside locks must be set)

✓ WEATHER RESISTANT

Can resist above or below normal weather conditions without compromising security.

✓ NON-HANDED

Easily field reversible handing.