


Hydraulic Door Closer with Dual Valve Adjustments - Closing & Latching Speeds



5 Year Warranty

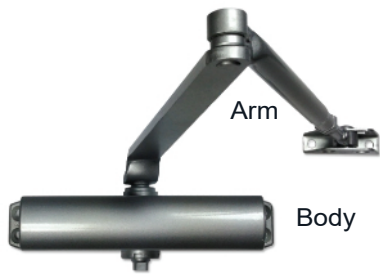

Body



Non-handed for standard, top jamb or parallel arm installation. **Aluminum finish.** Optional bracket available for parallel installation. Special order 1-2 days.

INT852AL

For Small 32" Door
8" Wide x 1-3/4" Height
Wt. 5 lbs.

INT853AL

For Medium 36" Door
8-3/4" Wide x 1-3/4" Height
Wt. 5.4 lbs.

INT855AL

For Large 48" Door
9-3/4" Wide x 1-3/4" Height
Wt. 6 lbs.

Mounting Plates 3/16" Thick - Can be used on INT852, INT853 with some modification. Fits INT855 & INT8052AL. Plates are drilled and tapped. Screws included with each door closer. 62MPS - Wt. 0.10 lb. 62MPB - Wt. 0.60 lb.

Arm Plate

**62MPS**

2-1/2" L. x 1" H. x 1-3/4" On-Center

Body Plate

62MPB

10" L. x 1-1/2" H. x 9-1/16" On-Center

INT547AL - Plate

Flat Drop Bracket with dress cover for: International 8052 & 855 Closers
10-5/8" L. x 3-7/16" W. X 3/16" Thick
Aluminum Finish

**INT547AL**

Swinger 300 Pedestrian Hydraulic Door Closer with Dual Valve Adjustments - Closing & Latching Speeds

**INTSWINGER300**


- * **48" Gate - 300 lbs. Max.**
- * 2" x 4" x 12" x 16 ga. galvanized steel housing.
- * Non-handed (right and left swing)
- * Opens to a full 105°
- * Fully adjustable top arm for proper gate alignment
- * Adjustable zinc plated bottom hinge with sealed ball bearings rated for 350 lbs.
- * Designed to close gate into latch position without slamming
- * Smooth operation
- * Adjustable spring power to accommodate various gate sizes
- * Factory tested to over 1,000,000 cycles
- * **5 Year Warranty**



Comes with an adjustable zinc plated bottom hinge with sealed ball bearings rated for 350 lbs.



Spring power adjustable from 5 lbs of Opening Force (at "0" turns) to Medium Spring Tension (at "9" turns)



ADA Hydraulic Door Closer 8052

A Grade 1 Handicap closer with adjustable spring power and adjustable delayed closing action controlled by a separate regulating valve, adjustable after installation.



Fire Rated
5 lb. Opening Force
Aluminum Finish



Model #8052

INT8052AL

Body Plate

62MPB

10" L. x 1-1/2" H. x 9-1/16" On-Center


10 Year Warranty

9-3/4" W. x 1-21/32" H. x 2-3/4" D.
Wt. 6.6 lbs.

- * Stable hydraulic door check fluid for any climatic operation and constant lubrication.
- * Universal application. Non-handed
- * Cast aluminum housing; forged steel arm.
- * Furnished with regular forearms.
- * Underwriters' Laboratories Inc. Listed.
- * Tri-Packed for standard, top jamb, and parallel arm installation.



INSTALLATION TYPES

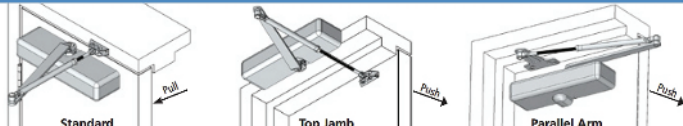

6805 AL Hydraulic Door Closer Standard / Adjustable Back-Check

**CALBR6805**

Aluminum Finish
5 Year Limited Warranty



Arm

Body

Model #6805

- * Certified ANSI A156.4 Grade 1
- * Dual Speed Control Valves - Closing and Latching speeds controlled by separate regulating valves, fully adjustable after installation
- * Underwriters' Laboratories Inc. Listed
- * Adjustable to 180 degrees opening
- * No Hold Open Model
- * CA6800 Series has adjustable Back-Check function controlled by a separate regulating valve, adjustable after installation
- * Universal application. Non-handed for Standard, Top Jamb, or Parallel Arm installation.
- * Rack and pinion control mechanism contained in a high tensile precision die cast aluminum housing
- * Stable hydraulic door check fluid for any climatic operation and provides constant Lubrication.



9-13/16" W. x 1-25/32" H. x 2-27/32" D.
Wt. 6.6 lbs.