


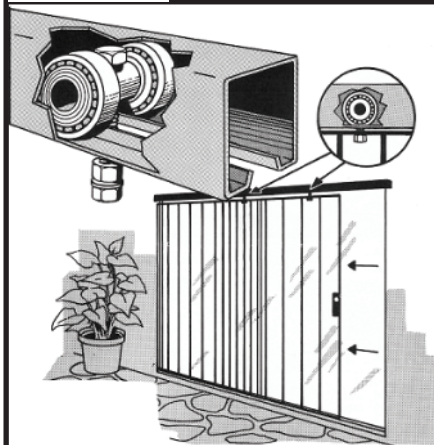

Galvanized Overhead Box Track 14 Gauge. 12 Ft or 24 Ft Lengths

**12 ft.**

12 Ft Length x 14 Gauge
2-3/8" H. x 1-7/8" O.D. W.
Wt. 22.5 lbs.

OVTAGAL

24 ft.

24 Ft Length x 14 Gauge
2-3/8" H. x 1-7/8" O.D. W.
Wt. 44.5 lbs.

OVTCGAL

Economy Track Wheel Lubricated Ball Bearings



1-5/8" Dia. Wheel
1-11/16" O.D. Hub
12 mm Dia. x 4" Bolt
2-3/4" Extension Below Track
Rating: **150 lbs**
Zinc Plated
Wt. 0.60 lb.

Zinc Plated

OVTTRW

Heavy Duty Single Track Wheel Two Factory Sealed, Permanently Lubricated Ball Bearings Per Carrier



2-1/16" Dia. Wheel
1-9/16" O.D. Hub
1/2" Dia. x 5" Bolt
4" Extension Below Track
Rating: **150 lbs**
Zinc Plated
Wt. 1 lb.

Zinc Plated

OVT21T

Heavy Duty Single Track Wheel Four Factory Sealed, Permanently Lubricated Ball Bearings Per Carrier



2-1/16" Dia. Wheel
1-9/16" O.D. Hub
1/2" Dia. x 5" Bolt
3" Extension
Below Track
Rating: **300 lbs**
Zinc Plated
Wt. 1.75 lbs.

Zinc Plated

OVT41T

Single Pivot Side-Wall Bracket Galvanized



Pivoting Action For
Easy Installation

Height: 4"
Width: 2"
Hole Size: 7/16"
Wt. 0.80 lb.

OVT1-301

Fixed Left End Single Side-Wall Bracket Galvanized



Height: 4"
Width: 2"
Hole Size: 7/16"
Wt. 0.90 lb.

OVT2-301L

Fixed Right End Single Side-Wall Bracket Galvanized



Height: 4"
Width: 2"
Hole Size: 7/16"
Wt. 0.90 lb.

OVT2-301R

Single Ceiling Bracket Galvanized



Height: 3-3/8"
Width: 1-3/4"
Hole Size: 7/16"
Wt. 1.1 lbs.

OVT3-301

Double Side-Wall Bracket Galvanized




Height: 7"
Width: 2"
Hole Size: 7/16"
Wt. 2.4 lbs.

OVT5-301

Stay Roll Adjustable Sliding Gate Guide

To hold a sliding door against the wall.



* 2" Dia. Wheel
* Adjusts 1" -- 3-3/4"
* 3-1/2" Sq. Plate
with 1/4" holes

OVT97S