

9800 Series Exit Device Hardware (Continued)

EN400 The Outdoor - Trine UL-Rated Strike For Cylindrical / Mortise Lock as well as Rim Panic Bars

The Only Electric Strike Solution on the Market that can handle Cylindrical, Mortise, Deadlatches, and Rim Panics. EN400 comes with the gatebox and comes with the an Extra Latch so it can be used with Rim Panic Exit Devices and also an Extra Coil.



TREN400CMRP

- * Outdoor Rated
- * Always Low Current Draw
- * BHMA **Grade 1** Electric Strike
- * Lt. & Rt. Handing Field Reversible
- * **2,000 + lbs. Holding Force**
- * Fail-Safe / Fail-Secure Field Reversible
- * Polished Stainless Steel Finish
- * Includes Gate Box K-BXES-EN400 unfinished
- * Installed with Cylindrical/Mortise Latch out of box



Comes with the 400RP latch to be used with Rim Panics and can be change in the field and also an extra coil (EN Coil 24DC)



Rim Panic Latch




EN Coil 24DC

Volts	Current / Ohms	Duty	Sound	Wire
12 DC	0.280 / 43.0	Intm. /Cont.	Silent	2- Orange & White
24 DC	0.150 / 164.0	Intm. /Cont.	Silent	2- Black & White

EN800 The Outdoor - Trine UL-Rated Strike Use With Surface Mounted Rim Exit Devices

Works with 9800 Series or 2200 Series Panic Bars

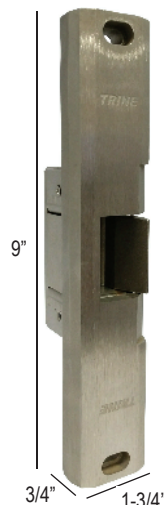

- * Outdoor Rated
- * 24 DC
- * 3/4" Thick Face Plate
- * Latch Height 1-1/2" x 1-3/8" Depth
- * Use With Surface Mounted Rim Exit Devices With up to 1" Throw
- * BHMA **Grade 1** Electric Strike
- * Lt. & Rt. Handing Field Reversible (RH out of Box)
- * **2,000 + lbs. Holding Force UL Tested**
- * Factory Default "Fail-Secure"
- * Fail-Safe / Fail-Secure Field Reversible on DC Units
- * Polished Stainless Steel Finish 32D

TREN800



Volts	Current / Ohms	Duty	Sound	Wire
12 AC	0.700 / 4.5	Interrupt Mode	Buzz	1- Blue, 1- Orange/White
24 AC	0.370 / 18.0	Interrupt Mode	Buzz	1- Blue, 1- Black/White
12 DC	0.280 / 43.0	Intm. /Cont.	Silent	2- Orange & White
24 DC	0.150 / 164.0	Intm. /Cont.	Silent	2- Black & White

Surface-Mount Electric Rim Strike


Works with 9800 Series or 2200 Series Panic Bars



3/4" Throw Pullman Latchbolt
3/4" Thick Metal Housing
Five Year Limited Warranty

ENFSD-998C-NUQ


ENFORCER

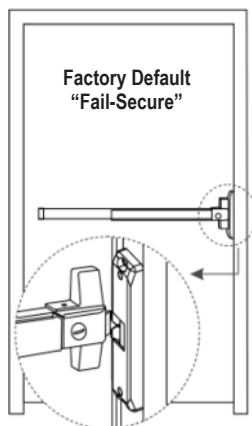

Operating Voltage		12 / 24 VDC
Current Draw	12 VDC	540 mA
	24 VDC	270 mA
Operating Temperature		14° ~ 113° F (-10° ~ 45° C)
Operating Humidity		0 ~ 95%
Lock Mode		Fail-Safe / Fail-Secure
Static Strength		1,500 lb.
Endurance Rating		250,000 Cycles
Dimensions		8" x 1-3/4" x 3/4"

Electric Strike Release For Rim Type Panic Bars

Features: 300,000 Life cycles, Holding Force 1200 lbs. , Die Cast Case, Heavy Duty Latch Spring, Mortise Type - Backset 1-5/8" Deep, and Fail Secure (standard action) 24V AC. Satin Chrome - US26D. Fits the Weldable 7140BOX with some slight modification to release. Wt. 1 lb.

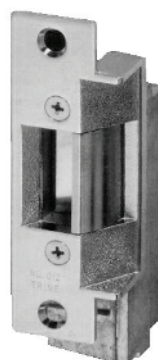

Face Plate: 1-1/4" x 4-7/8"
Solid Cast Latch - Chrome plated,
Cavity Depth: 9/16" x 1-5/8" W.
Overall Height: 5-1/8" x Depth: 1-5/8"

TR012C24

The 7140BOX needs slight modification to except the TR012C24 VAC electric release.
9" H. x 2" D. x 2" W. Wt. 1.25 lbs.

7140BOX

Volts	Current / Ohms	Duty	Sound
24 AC	0.42 / 47.0	Intermittent	Buzz