

9800 Series Exit Device Hardware (Continued)

Outside Trim Lever Design

"Two functions to choose from"



Schlage
Keyway

Lever comes with a
Free-wheeling Clutch
(Lever turns freely for an added
"no foot-hold" security feature)

This Trim Lever can also be used with
CR2200 Series Exit Device when used
with K-BX4152 Box and CRTAIL1 or
K-BX515175 Box

Storeroom: Key operates
lever, otherwise always
locked. Wt. 3 lbs.

CRSTR05LX26D

Entrance: Key retracts latch-
bolt, unlocks lever. Wt. 3 lbs.


CRENT00LX26D

Extension Tail Kit 2-1/4" for the above
Trims to fit a 2" deep box K-BX4152

CRTAIL1



Adjustable Panic Shield Strike Bracket (Silver or Black Color)

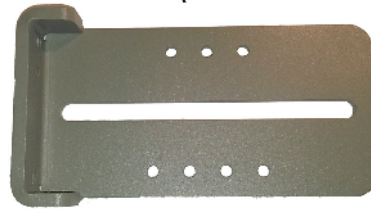

LKPS-SB-S Silver



LKPS-SB-B Black



7" L. x 3.5 H. X
3/16" Thick Plate
Hardware Included
(screw pack)

LOCKEY
USA

2" Deep Weldable Box For 9800 Series Outside Trim Devices

Blank Box - No Holes



15" Height
4" Wide
2" Depth
Mtl. 14 ga.
Wt. 4



K-BX4152

To be used with 9800 Series Exit Device,
CRNESC9805X26D, CRNESC9800X26D,
CR9800NLX32D, CL600PK-BS & CL5000PK-BS

1-3/4" Deep Weldable Box For 9800 Series Outside Trim Devices

Blank Box - No Holes



15" Height
5" Wide
1-3/4" Depth
Mtl. 14 ga.
Wt. 5.5



K-BX515175

To be used with 9800 Series Exit Device,
CRNESC9805X26D, CRNESC9800X26D,
CR9800NLX32D, CL600PK-BS & CL5000PK-BS

Extra Wide Weldable Box For Series Rim Type Exit Device

Blank Box - No Holes



11" Height
7" Wide
1-1/2" Depth
Mtl. 14 ga.
Wt. 6 lbs.

K-BX711150



Adjustable Panic Shields

No Pre-drilled Holes for Mounting Panic Bars

LOCKEY
USA

All Panic Shields have one inside and one out-
side adjustable sliding panel, and are designed
to be mounted on the inside of the gate. Shields
can be mounted on the right or left side of gates
28" - 54" wide. Compatible with ANY panic bar.
24" High. Color: Silver Gray or Black.
Wt. 25.5 lbs.

LKPS-24-S

Silver Gray

LKPS-24-B

Silver Gray

