

Gate Hinges

1-7


Single Action Self-Closing Spring Hinges

Steel Material, Powder Coated Finish, Non-Handed, Adjustable Spring Tension




GH151-3 1/2

3-1/2" x 3-1/2" Width
Hinge Leaf Ga. 1/8"
Wt. 1.35 lbs.



JSGH151-4

4" x 4" Width
Hinge Leaf Thickness .130"
Wt. 1.75 lbs.



JSGH151-4 1/2

4-1/2" x 4-1/2" Width
Hinge Leaf Thickness .134"
Wt. 2.3 lbs.



JSGH151-6

6" x 4-1/2" Width
Hinge Leaf Thickness .093"
Wt. 5.5 lbs.



JSGH151-7

7" H. x 4-1/2" W.
Hinge Leaf Thickness .093"
Wt. 6.26 lbs.




Swaged
Hinge Leafs Lay Flat

Sold in Pairs

Recommended Max. Door Weight					No. of Spring Hinges	No. of Butt Hinges
3.5 x 3.5	4 x 4	4.5 x 4.5	6 x 4	7 x 4-1/2	2 Each	1 Each
70 lbs	85 lbs	100 lbs	125 lbs	130 lbs	3 Each	None
90 lbs	110 lbs	150 lbs	155 lbs	175 lbs		

4" & 6" Double Action Steel Spring Hinges

Steel Material, Non-Handed, Adjustable Spring Tension, Gray Finish

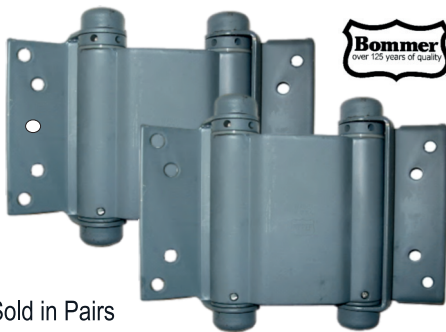

Sold in Pairs


4" Double Action Hinge #GH151-4DBL

For Door Thickness 7/8" to 1-1/4"
4 Mounting Holes
3-1/2" W. x 4" H. x 1-1/4" D. (folded) - Wt. 3.75 lbs.

6" Double Action Hinge #GH151-6DBL

For Door Thickness 1-1/4" to 1-3/4"
5 Mounting Holes
4-1/2" W. x 6" H. x 1-1/2" D. (folded) - Wt. 8.80 lbs.

TOP VIEW OF HINGE OPERATION

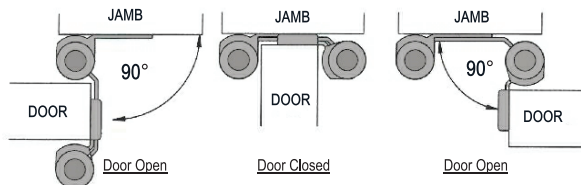

Recommended Max. Door Weight		No. of Double Action Spring Hinges
4"	6"	
60 lbs	75 lbs	2 Each
75 lbs	107 lbs	3 Each

Stainless Steel Spring Hinge

304 Grade, Non-Handed, Adjustable Spring Tension



Sold in Pairs

4-1/2" x 4-1/2" Width
Hinge Leaf Ga. 1/8"
Wt. 2.3 lbs.

CRNEWSH140X32D



Swaged Hinge Leafs Lay Flat

Recommended Max. Door Weight	No. of Spring Hinges	No. of Butt Hinges
4.5 x 4.5		
70 lbs.	2 Each	1 Each
115 lbs.	2 Each	1 Each
150 lbs.	3 Each	None

Dino Hinge - 180° Double Bearing Hinge With 2 way 13/16" Adjustability (No Welding Required)

The Dino hinge is a double load-bearing only hinge in an aluminum casing. The bearings guarantee a smooth opening and closing of the gate. Easy to install with Quick-Fix fixings "No Welding Needed". Its 180° opening angle together with its 13/16" vertical and 13/16" horizontal adjustability make the hinge flexible. These hinges are non-handed & supports gates up to 5 ft. wide and 330 lbs. Three year warranty. 14 ga. material recommended.



Sold in Pairs


Color: Black

LOCDINO-BLK

Silver Color Available



Quick-Fix Fasteners

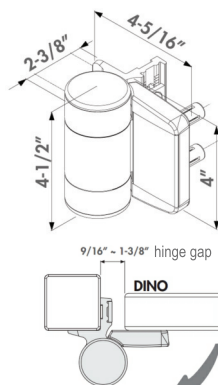

Puma Hinge - Compact 2-Way Adjustment 180° Surface Mounted Hinge (No Welding Required)

The Puma hinge is a compact load-bearing only surface-mounted hinge with a powder-coated aluminum housing. Its 180° opening angle together with its 3/4" vertical and 5/8" horizontal adjustability make the hinge flexible. These hinges are non-handed & simple to install thanks to the Quick-Fix fastening system; no welding needed. Supports gates up to 3.5 ft wide and 132 lbs. Three year warranty. 14 ga. material recommended.



Sold in Pairs

Color: Black

LOCPUMA

Silver Color Available



Quick-Fix Fasteners

